

Single Wing PLANE Line RC6 Burglar Proof Safety Door**Burglar Proof** **RC6** **in accordance with DIN V ENV 1627****Range of Dimensions:** **up to 1250 mm / 2250 mm**


(* special options)

Technical specification and text for invitation to tender

Product:	SEC 11 single wing security steel door brand Buchele in accordance with DIN V ENV 1627
Door Type:	SEC 11 / RC 6
Burglar Proof:	RC 6
Dimensions: x mm
Door Leaf:	Double walled, level 64 mm thick steel door leaf, three sides folded with thin rebate without bottom stop. Special insulating inserts completely laid in and glued. Safety bolt screwed in door leaf fold.
Sill:	Floor bracket as separation bar. Surface galvanized and welded to the frame.
Frame:	3-sided circumferential folded corner frame with high-quality multi-chamber sealing profile adjustable fixed in the three sided groove.
Hinges:	Threepart height-adjustable construction hinges with hinge pin retention and ball-bearing spacer ring for smooth door movement.
Fitting:	6-point safety locking system with latch lever function in accordance with DIN EN 12209 (prepared for installation of a profile cylinder lock provided by customer). Special safety door handle set firmly installed turnable aluminium F1 in U-shape with square protective plate.
Surface:	Door leaf and frame galvanized and primed with one component primer similar RAL 7001.
Mounting:	Delivery and professional assembly including filling of the cavities in the frame with mortar of group III.

Special Models

Noise Control:	Up to R _{w,P} 51 dB drop seal or stopper sill
Bullet Proof:	FB 4 or FB 6 special inlay in door and frame
Stainless steel:	Material 1.4301 (V2A) res. 1.4571 (V4A), Surface brushed and rotary matte finished.

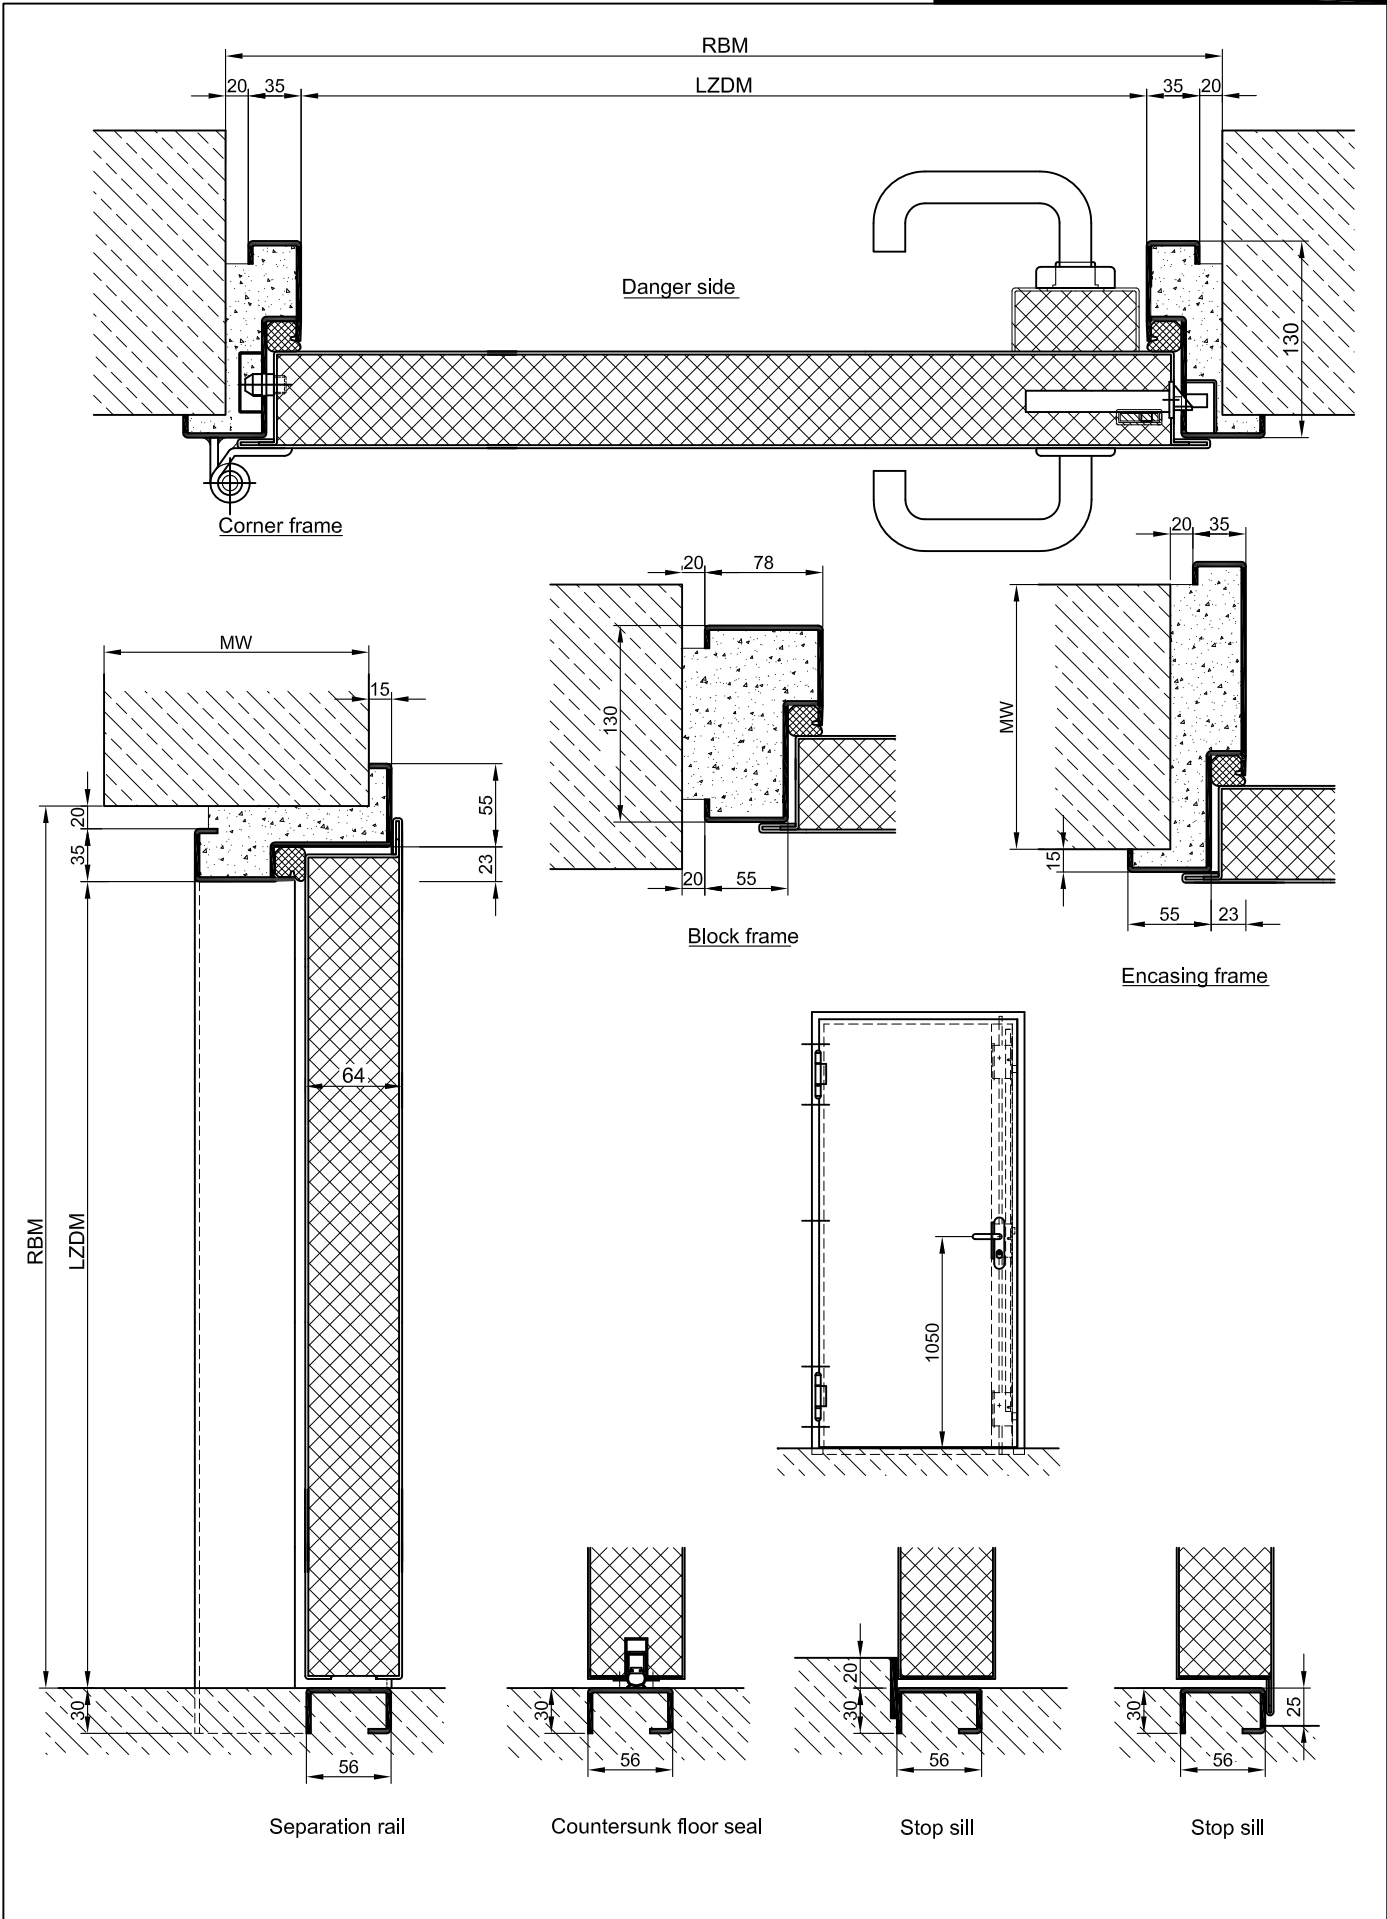

technische Änderungen vorbehalten - Stand 01/17